

Applicants : Günter Engel, et al.
Serial No. : 10/526,687
Filed : March 2, 2005
Page : 8

Attorney's Docket No.: 14219-082US1
Client's Ref.: P2002,0740USN

REMARKS

Applicants present claims 1 to 20 for examination. Claims 1, 17 and 20 are independent.

Entry hereof and early passage to issue are respectfully requested.

Applicants' attorney can be reached at the address shown above. All correspondence should continue be directed to Paul A. Pysher at the same address.

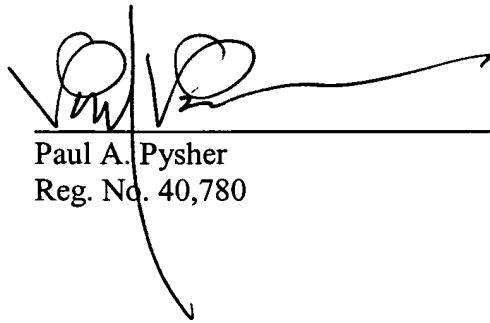
Please apply any fees associated with this Preliminary Amendment or the accompanying application, which have not already been covered by check, to Deposit Account 06-1050.

Respectfully submitted,

Date:

May 5, 2005

Fish & Richardson P.C.
225 Franklin Street
Boston, MA 02110-2804
Telephone: (617) 542-5070
Facsimile: (617) 542-8906


Paul A. Pysher
Reg. No. 40,780

MULTIPLE RESONANCE FILTER

TECHNICAL FIELD

5 ~~The invention concerns~~ This patent application relates to a multiple resonance filter that contains a plurality of multilayer capacitors.

BACKGROUND

10 In a multiple resonance filter known from patent US 5898562, two adjacent multilayer capacitors of differing capacitance are integrated in a multilayer component. This component is used for the attenuation of two frequencies determined by the capacitances of the two capacitors. The disadvantage of the known art component is that the values for attenuation are relatively poor.

15 SUMMARY

For ~~this~~ the foregoing reason, ~~the one~~ goal of the present invention is to disclose a multiple resonance filter that has good attenuation values.

20 ~~This goal is achieved by a multiple resonance filter according to claim 1.~~
~~Advantageous embodiments of the invention may be derived from the additional claims.~~

A multiple resonance filter is disclosed that is an electronic multilayer component. It contains at least three multilayer capacitors, which are arranged adjacent to one another. The multilayer capacitors have, in this case connection, at least two capacitances differing from one another. Of the multilayer capacitors positioned in a row, the two outer ones
5 have this capacitance.

As a result of the structure of the multiple resonance filter with capacitors arranged adjacent to one another in a row, and as a result of ~~the~~ forming of capacitors with the same capacitance at ~~the~~ two edges of the row, it is possible to achieve decoupling of the
10 electromagnetic fields in the filter, ~~which~~. This decoupling results in improvement of the attenuation behavior at the individual resonant frequencies.

~~These~~ The foregoing characteristics ~~give rise to the~~ result in an advantage of the multiple resonance filter, namely its improved attenuation behavior.

In an advantageous embodiment of the multiple resonance filter, the multilayer capacitors are connected in parallel to one another. As a result of the parallel connection, the filter characteristics of the multiple resonance filter can be improved even further.

In an embodiment of the multilayer component, a basic element is provided that has a stack of dielectric layers, in which the dielectric layers are placed on top of one another. Electrode layers are arranged between the dielectric layers. ~~The~~ One advantage

of this embodiment is that the technology of multilayer capacitors, which in itself is well known, can be used to implement the multiple resonance filter.

Multilayer capacitors are generally structured in such a way that electrode stacks, which interlock in a comb-like manner, are formed in the interior of the component by internal electrode layers. Each stack of electrode layers is jointly connected ~~with~~ to an external contact.

In an embodiment of the multiple resonance filter, external contacts of the electrode layers are arranged on the front faces of the basic element.

In another embodiment of the multiple resonance filter, electrode layers ~~belonging to~~ associated with different capacitors are connected with one another in the interior of the basic element. As a result, a parallel connection ~~in parallel~~ of the individual capacitors results ~~can occur, in an advantageous manner,~~ in the interior of the basic element, i.e. that ~~is,~~ in the interior of the component.

In an embodiment of the multiple resonance filter, electrode layers progress in the longitudinal direction of the basic element. In another embodiment, electrode layers progress ~~in parallel~~ normal to the longitudinal direction of the basic element.

In an embodiment of the multiple resonance filter, external contacts of the electrode layers are arranged on ~~lateral~~ side faces of the basic element. This embodiment of the filter makes it possible to assign the external contacts individually to each individual capacitor of the multilayer component. This embodiment of the filter makes it
5 possible ~~and~~ to carry out the desired switching of the capacitors among one another only on the printed circuit board to be assembled with the component. This ~~advantageously~~ increases the flexibility of application options for the component.

In particular, ~~this~~ the foregoing makes it possible to connect the multilayer
10 capacitors in parallel to one another outside the basic element.

In an embodiment of the filter, three multilayer capacitors are provided. In another embodiment of the filter, four multilayer capacitors are provided[[,]]. The two middle multilayer capacitors have ~~having~~ the same capacitance.

In an embodiment of the filter, the multilayer capacitors, together with the ~~inductive resistors~~ inductors of the electrode layers or together with the ~~inductive resistors~~ inductors of the leads to the electrode layers, form LC filters. As a result of the addition of ~~inductive resistors~~ inductors to the component, the filter characteristics of the
20 component can be increased further. Because the principal contribution of the ~~inductive resistors~~ inductors needed for the filter originates in the leads and the electrode layers, it is

possible to adjust the inductance ~~inductivity~~ through suitable design of the electrode layers and/or the leads to the electrode layers to a desired degree ~~level~~.

In an embodiment of the filter, the dielectric layers contain capacitor ceramics ~~on~~
5 ~~the basis of~~ that are based on barium titanate. For example, a dielectric layer made of so-called "COG" ceramics is possible. Such a material ~~materials~~ would include, e.g., (Ba, Sm) NdTiO₆ ceramics. However, an "X7R" ceramic, such as doped barium titanate, would also be possible.

10 In another embodiment, the dielectric layers contain a capacitor material having a varistor effect.

A possible ceramic material with a varistor effect would be ZnO-Bi- or ZnO-Pr-based ceramic material. The advantage of such dielectric layers is that, in addition to the
15 capacitor, they also integrate a varistor, as an additional component, into the capacitor.

It is also possible to combine capacitor ceramics and ceramics having a varistor effect within a single component.

20 In an embodiment of the filter, the basic element has a surface area smaller than 6mm². ~~The~~ One advantage of this embodiment is that the space requirements of the component are very small, which is advantageous for miniaturized circuits.

In an embodiment of the filter, electrode layers ~~belonging to~~ associated with the two outer multilayer capacitors have ~~large~~ identical surface areas. ~~The~~ One advantage of this embodiment is that the need for ~~large~~ identical capacitances of the external multilayer capacitors can be met ~~especially easily by means of large~~ via the identical surface areas.

In the following, the invention is explained in greater detail on the basis of exemplary embodiments and the corresponding figures:

DESCRIPTION OF THE DRAWINGS

Figure 1 shows a multiple resonance filter in schematic cross-section.

Figure 2 shows the insertion attenuation of the component from Figure 1.

Figure 3 shows, as an example, another multiple resonance filter in an exterior perspective view, wherein the exterior view encompasses more options for the inner structure.

Figures 31, 31A, 31D show, as an example, the internal structure for a component having an external structure in accordance with Figure 3.

Figures 32, 32A, 32D show the internal structure of another filter, the external structure of which is shown in Figure 3.

Figures 33, 33a, 33D show, by way of example, an internal structure of another component, the external structure of which is shown in Figure 3.

Figures 34, 34a, 34D show, by way of example, the internal structure of another filter, the external structure of which is given by Figure 3.

Figure 4 shows an example of the external structure for a filter, this structure being applicable for filters whose internal structure is shown in Figures 41, 41A and 41D, as well as in Figures 42, 42A and 42D.

Figures 41, 41A, 41D show the internal structure for an embodiment of the filter, the external structure of which is given by Figure 4.

Figures 42, 42A, 42D show the internal structure for another filter, the external structure of which is given by Figure 4.

Figure 5 shows an example of the external structure of a filter in a perspective view, the external structure being applicable for a plurality of internal structures.

Figures 51, 51A, 51D show the internal structure of a filter, the external structure of which is given by Figure 5.

Figures 52, 52A, 52D show the internal structure of another filter, the external structure of which is given by Figure 5.

DETAILED DESCRIPTION

Figure 1 shows a multiple resonance filter that has a basic element 1. In the interior of the basic element 1, capacitors K1, K2, K3, K4 are arranged adjacent to another in a row. Each of the capacitors K1, K2, K3, K4 is connected with a first capacitor ~~connection~~ connector 211, 212, 213, 214 and with a second capacitor ~~connection~~ connector 221, 222, 223, 224. The first capacitor ~~connection~~ connectors 211, 212, 213,

214, each ~~belonging to~~ for a capacitor K1, K2, K3, K4, are connected with one another in an electrically conductive manner by a contact 32. A parallel circuit of the capacitors K1, K2, K3, K4 is implemented ~~by means of the~~ via contacts 31, 32. With respect to their capacitance C1, C2, C3, the capacitors K1, K2, K3, K4 are designed so that the capacitors K1 and K4 have capacitance C1, meaning that they are identical in capacitance. The capacitors K2 and K3 have capacitances C2 and C3. Capacitances C2, C3 can be identical or different from one another.

Figure 2 shows the attenuation behavior of the multiple resonance filter from Figure 1 in the case in which the two capacitors K2 and K3 from Figure 1 have the same capacitance C2. In Figure 2, the attenuation S, in decibel units, is plotted over the frequency f, measured in GHz, of an electric signal that was applied to the filter. It is evident, in Figure 2, that a very high attenuation of less than -40 dB was measured at resonant frequencies f1 and f2. This shows that the multiple resonance filter described in this application has very good attenuation characteristics. In this ~~case connection~~, the two resonant frequencies f1, f2 at which the minima appear in the attenuation curve are due to ~~given by~~ the capacitances C1 and C2 of the capacitors K1, K2, K3, K4.

Figure 3 shows the external structure of a multiple resonance filter, in which the external contacts 71, 72 are arranged on the front faces of the basic element 1 in cap form. The advantage of the cap-formed arrangement of the external contacts 71, 72 is that the component is suitable for the surface mounted design ~~assembly method~~. In this case

~~connection~~, the external contact 71 is applied to the front face 81 of the basic element and the external contact 72 to the front side 82 of the basic element 1.

Figure 31 shows a section along line C-C from Figure 3. The dielectric layers 4 placed on top of one another, which are separated from one another by electrode layers 52, 62, are visible. Because, in the example of Figure 31, the contacting of the electrode layers 52, 62 occurs through the ~~side~~ front faces of the basic element, the electrode layers 52, 62 are not drawn out to the outer lateral edge of the basic element in Figure 31. The electrode layers 52, in this case for connection, ~~belong to~~ a multilayer capacitor, ~~the electrodes 52~~ are all ~~being~~ switched in parallel to one another. The electrode layers 62, which, for their part, are placed on top of one another in the same manner as the electrode layers 52, also belong to the same multilayer capacitor as the electrode layers 52, and are arranged to be laterally offset relative to the electrode layers 52. The comb-like interlocking of the electrode layers 52 and 62 also follows from Figure 31. In Figure 31, the electrode layers 52 are identified by continuous lines, whereas each of the electrode layers 62 is identified by a dotted line. This applies by analogy to Figures 31D, 32, 32D, 33, 33D, 34, 34D, 41, 41D, 42, 42D, 51, 51D, 52 and 52D.

The multilayer capacitors described here are all fundamentally structured as shown in Figure 31. This applies, in particular, to the comb-like interlocking of the electrode layers.

Figure 31A shows a section along line A-A from Figure 31. It is evident that three multilayer capacitors K1, K2, K3 are arranged in the interior of the multilayer component. The two outer capacitors K1, K3 comprise, in this ~~case connection~~, electrode layers 51, 53 and 61, 63, respectively, which have the same surface area. For this reason, the capacitors K1 and K3 have the same capacitance. In contrast, the multilayer capacitor K2, which is arranged in the center of the row of capacitors K1, K2, K3, comprises electrode layers 52, 62, which are larger than the electrode layers 51, 61, 53, 63. Accordingly, the capacitor K2 has a greater capacitance than capacitors K1 and K3. In Figure 31A, the electrodes placed in the section plane are depicted as hatched areas delimited by continuous lines. Electrode layers arranged in a plane located above or below this level, which, in particular, are the electrode layers 61, 62, 63, as well as the inner connecting element 92, are depicted by areas delimited by dashed lines. Figure 31A shows that the electrode layers 51, 52, 53 are connected with one another by an inner connecting element 91. The inner connecting element 91 can be formed in the same manner as the electrode layers 51, 52, 53. For example, it can be constructed of a metalliferous paste in multilayer technique.

The connecting element 91 is contacted directly with the external contact 72. Accordingly, there is an inner connecting element 92 for electrode layers 61, 62, 63, said connecting element connecting these electrode layers 61, 62, 63 with one another in an electrically conductive manner. The inner connecting element 92 is connected with the

external contact 71 in an electrically conductive manner. This achieves internal parallel connection of the capacitors K1, K2, K3.

Figure 31D shows a section along line D-D from Figure 31A. In a depiction
5 analogous to that shown in Figure 31, it can be seen that for each capacitor there are
electrode layers 51, 52, 53 placed on top of one another (identified by continuous lines for
the first contact of the capacitors) and/or electrode layers 61, 62, 63 placed on top of one
another (identified by dashed lines for the second contact of the capacitors). The electrode
layers 51, 52 as well as 52, 62 and 53, 63, which are placed on top of one another, each
10 form a multilayer capacitor K1, K2, K3. The connecting elements ~~element~~ 92, 93 are also
shown in Figure 31D. It should be noted, in this regard, that, in the depiction shown in
Figure 31D, the connecting elements 91, 92 are depicted in a plurality as stacks of
connecting elements 91, 92 placed on top of one another.

15 Figure 32 shows the inner structure of a multiple resonance filter corresponding to
Figure 31, the difference being that only the inner connecting elements 91, 92 are shown.
The inner connecting elements 91 are depicted as dashed lines. The inner connecting
elements 92 are depicted as continuous lines. Figure 32A shows a section along line A-A
from Figure 32. In analogy to Figure 31A, it can be seen that the multiple resonance filter
20 consists of four capacitors K1, K2, K3, K4, which are structured in a manner analogous to
Figure 31A, Figure 31D and Figure 31. The only difference between Figures 32, 32A and
32D and Figure 31, Figure 31A and Figure 31D lies in the number of capacitors. A lead

110 or a lead 111 is also shown in Figure 32A, from which it follows that ~~inductive~~
~~resistors~~ inductors can be integrated into the component using the leads 110, 111. In this
case connection, the ~~inductive resistors~~ inductors are determined by means of the length of
the leads 110, 111. The function of the leads 110, 111, in this case connection, is that of
5 the inner connecting elements 91, 92. It should be noted, in this regard, that the ~~inductive~~
~~resistors~~ inductors of the component also depend on the shapes and surface areas of the
electrode layers 51, 52, 53, 54 and/or 61, 62, 63, 64, as they are depicted in a top view in
Figure 32A and in cross-section in Figure 32D.

10 Figure 32D shows a section along line D-D from Figure 32A. Once again, four
electrode layers 51, 62 or 52, 62 or 53, 63 and 54, 64, which are placed on top of one
another, are shown. The structure is again depicted in analogy to the structure of Figure
31D.

15 Figures 33, 33A and 33D show a multiple resonance filter corresponding to
Figures 31, 31A, 31D or corresponding to Figures 32, 32A, 32D, the difference being that
the electrode layers 51, 52, 53 or 61, 62, 63 in the exemplary embodiment shown in
Figures 33, 33A, 33D do not progress at right angles to the longitudinal direction of the
basic element but rather in this longitudinal direction. The length of the inner connecting
20 element 91, 92 is shortened accordingly, ~~in which connection, however,~~ whereas the
length of the electrode layers 51, 52, 53 or 61, 62, 63 is enlarged. The various exemplary
embodiments with regard to the orientation of the electrode layers 51, 52, 53, 54 or 61, 62,

63, 64 show that a great deal of latitude exists with respect to the design of the capacitors and/or ~~inductive-resistors~~ inductors for the multiple resonance filter. Otherwise, the depiction shown in Figures 33, 33A, 33D corresponds to the examples from Figures 31, 31A, 31D.

5

Figures 34, 34A, 34D show an embodiment of the multiple resonance filter corresponding to Figures 33, 33A, 33D[[],]. The difference is ~~being~~ that four instead of three multilayer capacitors are formed in the component.

10

Figure 4 shows an external structure for a group of multiple resonance filters[[],]. Embodiments for the inner structure are ~~being~~ shown, as examples for this group, in Figures 41, 41A, 41D as well as 42, 42A, 42D. Figure 4 shows the multiple resonance filter with the basic element 1[[],]. External contacts 71, 72 ~~being~~ are arranged on its lateral surfaces 101, 102.

15

Figure 41 shows a section along line C-C from Figure 4. In analogy to the depiction shown in Figures 31, 32, 33, 34, stacks of dielectric layers 4 and electrode layers 52, 62, which are placed on top of one another, are shown. The views of the multiple resonance filter shown in Figures 41, 41A and 41D only differ from the depiction in Figures 31, 31A, 31D in that the capacitors are contacted from the side face of the basic element rather than from the front faces of the basic element ~~contacting of the capacitors does not progress from the front faces of the basic element but rather from the side faces~~

20

~~of the basic element.~~ Accordingly, the length of the leads 110, 111 is shortened, in Figures 41, 41A, 41D, for example, which is why the inductivity of the component is reduced in this embodiment. Each of Figures 41A, 41D shows sectional views that correspond, in analogous fashion, to Figures 31A, 31D.

5

Figures 42, 42A, 42D show an embodiment ~~for~~ of the ~~for the~~ multiple resonance filter corresponding to Figures 41, 41A, 41D[[],]. The difference being in this embodiment is that a plurality of four capacitors K1, K2, K3, K4 instead of three capacitors is formed in the interior of the component. Otherwise, the depictions in Figures 42, 42A, 42D correspond to the depictions in Figures 41, 41A, 41D.

10

Figure 5 shows an external structure for a multiple resonance filter, in which one basic element is provided. The basic element 1 has front faces 81, 82. The basic element 1 also has side faces 101, 102. Four external contacts 711, 712, 713, 714 or 721, 722, 723, 724 are arranged on each side face 101. In this case ~~connection~~, each opposing pair of external contacts 711, 712, 713, 714 or 721, 722, 723, 724 belongs to a capacitor in the interior of the basic element 1.

15

Figure 51 shows a section along line C-C from Figure 5. The depiction in Figures 51, 51A, 51D corresponds to the depiction in Figures 41, 41A, 41D[[],]. The difference being is that the connecting elements 91, 92 are absent here[[],] because each individual capacitor K1, K2, K3 is individually connected with external contacts 711, 712, 713, 714

20

or 721, 722, 723, 724 (see Figure 51A). Otherwise, the depiction in Figures 51, 51A, 51D corresponds to the depiction in Figures 41, 41A, 41D.

Figures 52, 52A, 52D show the inner structure of a multiple resonance filter[[,]] as
5 it can be formed having an external structure corresponding to Figure 5. The depiction in
Figures 52, 52A, 52D corresponds to the depiction in Figures 51, 51A, 51D, the difference
being that four capacitors K1, K2, K3, K4 instead of three capacitors K1, K2, K3 are
arranged along the component. Because the two center capacitors K2, K3 can be
designed, with respect to their electrode layers 52, 53 or 62, 63, to have the same
10 capacitance C2, the attenuation behavior at the second resonant frequency f_2 can be
significantly improved once again.

The invention is not limited to multiple resonance filters having two filter
frequencies, but can be applied to multiple resonance filters having a plurality of different
15 resonant frequencies.

Claims

1. Multiple resonance filter as multilayer component,

- containing at least three multilayer capacitors (K1, K2, K3, K4) adjacent to one
5 another, having at least two different capacitances (C1, C2, C3),

- wherein the two outer multilayer capacitors (K1, K4) have the same capacitance
(C1).

2. Filter according to claim 1,

10 - in which the multilayer capacitors (K1, K2, K3, K4) are connected in parallel to
one another.

3. Filter according to one of claims 1 or 2,

- which comprises a basic element (1) and which comprises a stack of dielectric
15 layers (4) placed on top of one another, having electrode layers (51, 52, 53, 54; 61, 62, 63,
64) between them.

4. Filter according to claim 3,

- in which external contacts (71, 72) of the electrode layers (51, 52, 53, 54; 61, 62,
20 63, 64) are placed on the front faces (81, 82) of the basic element (1).

5. Filter according to one of claims 3 to 4,

- in which electrode layers (51, 52, 53, 54; 61, 62, 63, 64) belonging to different capacitors (K1, K2, K3, K4) are connected with one another in the interior of the basic element (1).

5 6. Filter according to one of claims 3 to 5,

- in which the electrode layers (51, 52, 53, 54; 61, 62, 63, 64) progress in longitudinal direction of the basic element (1).

7. Filter according to one of claims 3 to 5,

10 - in which the electrode layers (51, 52, 53, 54; 61, 62, 63, 64) progress at right angles to the longitudinal direction of the basic element (1).

8. Filter according to one of claims 3 to 6,

15 - in which the external electrodes (711, 712, 713, 714; 721, 722, 723, 724) of the electrode layers (51, 52, 53, 54; 61, 62, 63, 64) are placed on side faces (101, 102) of the basic element (1).

9. Filter according to one of claims 3 to 7,

20 - in which the multilayer capacitors (K1, K2, K3, K4) outside the basic element (1) are connected in parallel to one another.

10. Filter according to one of claims 1 to 9,

- in which three multilayer capacitors (K1, K2, K3) are provided.

11. Filter according to one of claims 1 to 9,

- in which four multilayer capacitors (K1, K2, K3, K4) are provided, wherein the
5 two center multilayer capacitors (K2, K3) have the same capacitance (C2).

12. Filter according to one of claims 1 to 11,

- in which the multilayer capacitors (K1, K2, K3, K4), together with inductive
resistors of the electrode layers (51, 52, 53, 54; 61, 62, 63, 64) and the leads (110, 111),
10 form LC filters.

13. Filter according to one of claims 3 to 12,

- in which the dielectric layers (4) contain capacitor barium titanate-based
ceramics.
15

14. Filter according to one of claims 3 to 13,

- in which the electrode layers contain a ceramic material having a varistor effect.

15. Filter according to one of claims 3 to 14,

20 - in which the basic element (1) has a surface area that is smaller than 6 mm^2 .

16. Filter according to one of claims 3 to 15,

- in which the electrode layers (51, 52, 53, 54; 61, 62, 63, 64) belonging to the two outer multilayer capacitors (K1, K4) have identical surface areas.

ABSTRACT

MULTIPLE RESONANCE FILTER

A multiple resonance filter includes at least three multilayer capacitors having at
5 least two different capacitances. The at least three multilayer capacitors are adjacent each
other. Two of the at least three multilayer capacitors have a same capacitance. The two
capacitors with the same capacitance are on outer ends of an arrangement formed by the at
least three multilayer capacitors.